

RG351V



User Manual

System startup and shutdown

System Startup

1. TF1/INT is the system card. After inserting the system card, press and hold the power button on the right to start the system. If the system software is correct after the system is started, the motor will vibrate.

2. Shutdown:

Press SELECT to choose shutdown
Software shutdown (safety protect system)

3. TF2/EXT is to read the game, the format is FAT32, and the volume label is changed to GAMES (uppercase). Roms can be copied on the computer.
You must refresh or restart the system when you insert or remove dual cards, otherwise the interface will not be displayed.

System Main Interface

System Main Interface

After entering the main interface of the system, refer to the following table for key operation:

Left and right D-pad and joystick	Switching simulator platform
A key	To enter or confirm
B key	Return or cancel
START key	Setting
SELECT key	Software restart or software shutdown settings
L2R2	Game menu page flip
Y key	Game Collection

Key Settings

Key Settings

After entering the system, press the START button to enter the settings:

1. Language Settings
SYSTEM-SETTINGS -> LANGUAGE
2. Brightness Settings
System Settings->Brightness
3. External Handle Settings

After connecting the joypad to the USB-OTG port, press the Joypad A button to enter the Joypad button setting.

4. WIFI Settings

Network settings->Enable WIFI->WIFI SSID->Select hotspot SSID->WIFI KEY

After pressing the return option, WIFI Enabled appears and WIFI is connected.

After entering the network settings again, you can see the IP address.

Copy Game

Copy Game

There are many ways to copy games. The first is to insert the memory card of the game console into the computer and use DiskGenius software.

1. Open DiskGenius and make sure DiskGenius has recognized the memory card
2. Format the TF card to FAT32.
3. Create a rom folder (such as gba) corresponding to the simulator (note lowercase).
4. Safely pop up after transmission

The second way, after connecting to WIFI, enter the IP address and use SFTP protocol, username: root, password: amuelec


The third way, if you use the memory card equipped with the game console, you can directly insert it into the win10 computer to copy the game

Game Operation

Simulator operation

Almighty simulator		NDS	
F key + up and down	volume adjustment	L2	Screen switching
F key + left and right	Select archive location	R2	Show all screens
F key+R1	Store files	Start+A	Shortcut key exit
F key+R2	Display frames	L3	Bring up the simulator menu
F key+L1	Read file		
F key+L2	Game acceleration	MAME	
F key+L3	Bring up the simulator menu	L3	Call out submenu
		F key + up and down	volume adjustment
		F key + left and right	Select archive location
		F key+R1	Store files
		F key+R2	Display frames
PSP		F key+L1	Read file
L2	Game acceleration	F key+L2	Game acceleration
Start+A	Shortcut key exit	F key+L3	Bring up the simulator menu
F key	Bring up the simulator menu	F key+L3	Bring up the simulator menu

Main Console Keys and function layout

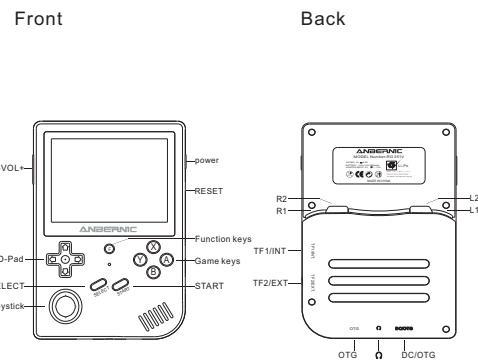

Q&A

Q: Cannot put into the game using DiskGenius.

A: Please confirm whether you have opened other software that occupies the memory card, causing it to fail to be inserted.

Q: Collect favorite games for easy play.

A: Press the Y button on the favorite game to collect it and view it in FAVORITES.

Q: The style of the simulator has changed, and the characters have become smaller.

A: Enter the system simulator to set, Input->Menu->xmb, you can restore to the default system simulator style.

Q: There are too many simulators and it is not convenient to browse.

A: Press B on the main interface to call up a simple list menu for easy browsing.

Q: It's not convenient to exit, I don't know how to press

A: When running the game, press the start+A key to forcefully exit the game.

matters needing attention

matters needing attention:
When reading and writing data, please do not press the reset button, which may cause data loss.

